


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H05K 3/32 // 3/34	A1	(11) International Publication Number: WO 95/19691 (43) International Publication Date: 20 July 1995 (20.07.95)
(21) International Application Number: PCT/SE95/00019 (22) International Filing Date: 12 January 1995 (12.01.95) (30) Priority Data: 9400084-1 14 January 1994 (14.01.94) SE (71) Applicant (for all designated States except US): XICON AB [SE/SE]; Ideon-Malmö, S-205 12 Malmö (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): WIKSTRÖM, Bo [SE/SE]; Jaktstigen 10, S-261 75 Asmundtorp (SE). (74) Agent: STRÖM & GULLIKSSON AB; P.O. Box 4188, S-203 13 Malmö (SE).		(81) Designated States: CN, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: A CIRCUIT BOARD WITH SPECIFICALLY DESIGNED CONNECTION TERMINALS

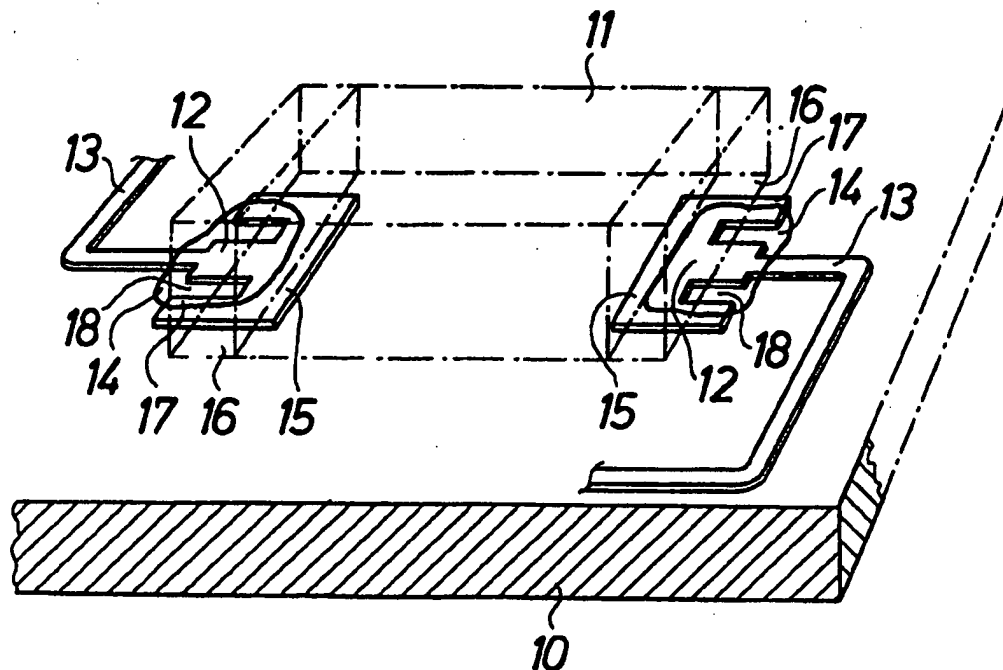

(57) Abstract

A circuit board (10) with spaced circuits (13) and connection terminals (12) of metal for connection of electrical components (11) between the connection terminals by means of electrically conductive glue (14), which connects the connection terminals (12) and the components (11) electrically and mechanically. The connection terminals (12) are designed in pairs with substantially continuous fronts (15) facing each other with a space (18), which is delimited behind the front (15) and is free from circuits (13) and connection terminals (12), for receiving and adhesion of the glue (14).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A CIRCUIT BOARD WITH SPECIFICALLY DESIGNED CONNECTION TERMINALS

5 Technical Field

The most frequently used method today of producing electrical circuits is to arrange circuit patterns of metal on a card or board of isolating material, usually a plastic material. Connection terminals are provided in the circuit pattern and are electrically connected with metallized contact surfaces of electrical components, so that the desired electrical function is obtained.

Technical Background

15 In order to obtain the electrical connection, solder of varying metal composition with a larger or lesser amount of lead is usually utilized. At surface mounting of the electrical components a mechanical connection between the connection terminal and the contact surfaces of the component is also established by means of the solder. The solder provides good mechanical strength, as contact surfaces as well as connection terminals are made of metal.

The connection terminals are usually rectangular plates, which are shaped in accordance with the circuit pattern. Circular connection terminals can also be found.

25 It has become common to replace the solder by electrically conductive glue. Such glues have considerable advantages with regard to environmental conditions, above all because lead is obviated. Electrically conductive glues also fit well into a development of the present soldering technique in order to obtain a better quality in the electronic industry.

30 Most available glues have satisfactory electrical qualities and have good adhesiveness to the board of plastic. However, the glue acts differently at the application in comparison with the solder, and a problem which has appeared is that glue flows in under the surface mounting

component. The component may herewith be short-circuited, so that the desired electrical function of the circuit is not obtained.

The Invention

5 An object with the present invention is to substantially obviate the above mentioned problems and to bring about a short-circuit free connection between the connection terminals of the circuit board by means of electrically conductive glue. The connection shall also be mechanically stable.

10 These objects are fulfilled in that the connection terminals are given such a form that glue is prevented from flowing from the connection terminal and spreading out under the surface mounting component, which is arranged between two adjacent connection terminals. The glue is instead allowed to flow in the opposite direction and spread out over the board, where the glue gets proper adhesion.

Short Description of the Drawings

20 The invention will be further described below under reference to the attached drawings, in which Fig 1 is a diagrammatic perspective view of a portion of a circuit board with connection terminals according to the invention and Figs 2 - 6 are diagrammatic plan views of alternative shapes for the connection terminals according to the invention, the left hand part of respective figure showing connection terminals without a component and the right hand part with a schematically shown component.

Detailed Description of Preferred Embodiments

30 Fig 1 shows a conventional circuit board 10. In a conventional way the circuit board 10 is provided with circuits 13 of metal in a desired pattern. The circuits 13 are ended with connection terminals 12 according to the invention where electrical components shall be connected with the circuits in order for the desired circuit function to

35

be obtained. In the shown example an electrical component 11 has been arranged between two connection terminals 12. In its ends the electrical component 11 is provided with metallized contact surfaces 16, which are electrically and mechanically connected with the connection terminals 12 by means of an electrically conductive glue 14.

Preferably the glue 14 is applied to the circuit board 10 on desired portions on beforehand by any suitable method, for example screen printing, coating, spraying etc. At the application of the glue 14 and/or when the glue is influenced, so that it flows in connection with the application of the component 11, the glue 14 shall be prevented from flowing in under the component and cause short circuiting and other malfunctions. This is according to the invention attained in that connection terminals 12, which are to be connected in pairs with each other by means of the component 11, are designed with continuous fronts 15 in its portions facing each other. The thickness of the connection terminals 12 and the circuits 13 is slightly exaggerated in Fig 1, but the elevation from the circuit board provided by the connection terminal 12 with the front 15 will guide the glue 14 in the direction away from the component 11. In the preferred embodiment according to Fig 1 the connection terminals 12 are further designed with side members 17, which are perpendicular to the front 15 and which prevent the glue 14 from flowing out sideways. There are free surfaces 18 of the circuit board 10 between the side members 17 and the front 15, against which the glue 14 strongly adheres.

Depending on the circumstances and the actual use, the contact surfaces 16 of the electrical components 11 can lie directly against the connection terminals 12 or be separated therefrom by means of a layer of glue 14.

Figs 2 - 6 show alternative embodiments of connection terminals 12, which have properties directly corresponding to the connection terminals shown in Fig 1. In the embodi-

ment according to Fig 5 side members 17 are lacking, which makes this embodiment less suitable in cases with several connection terminals arranged beside each other. Fig 6 shows an embodiment with a component having several contact surfaces. In such uses the connection terminals are grouped for conformity to the position for and the number of contact surfaces of the component.

The form and dimensions of the connection terminals 12 can be varied in many ways within the scope of the invention. Different materials can also be used for the circuit board, the circuits and the connection terminals. Electrically conductive glues of conventional kind are preferably used, but also anisotropic glues, i e glues conductive in only one direction, can be used in certain applications.




CLAIMS

1. A circuit board (10) with spaced circuits (13) and connection terminals (12) of metal for connection of electrical components (11) between the connection terminals
5 by means of electrically conductive glue (14), which connects the connection terminals (12) and the components (11) electrically and mechanically, characterized
in that the connection terminals (12) are designed
in pairs with substantially continuous fronts (15) facing
10 each other and in that a space (18), which is delimited behind each front (15) and is free from circuits (13) and connection terminals (12), is intended for receiving and adhering of the glue (14).

2. A circuit board according to claim 1, characterized
15 in that the connection terminals (12) are designed with side members (17) extending from the fronts (15) for sideways delimiting the space (18).

3. A circuit board according to claim 1, characterized
20 in that the connection terminals have the shape of an E.

4. A circuit board according to claim 1, characterized
in that the connection terminals are arrow shaped.

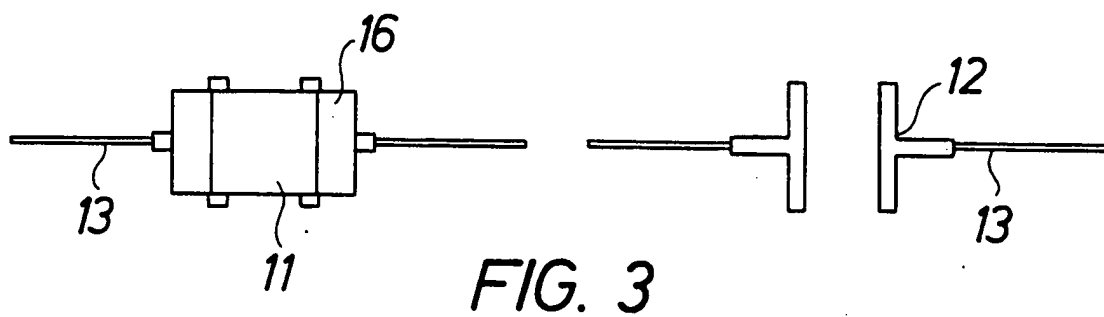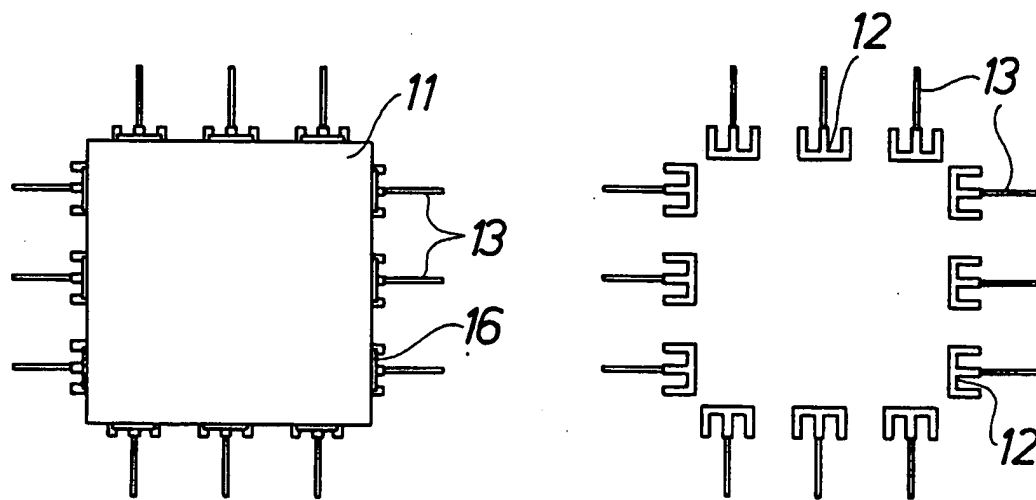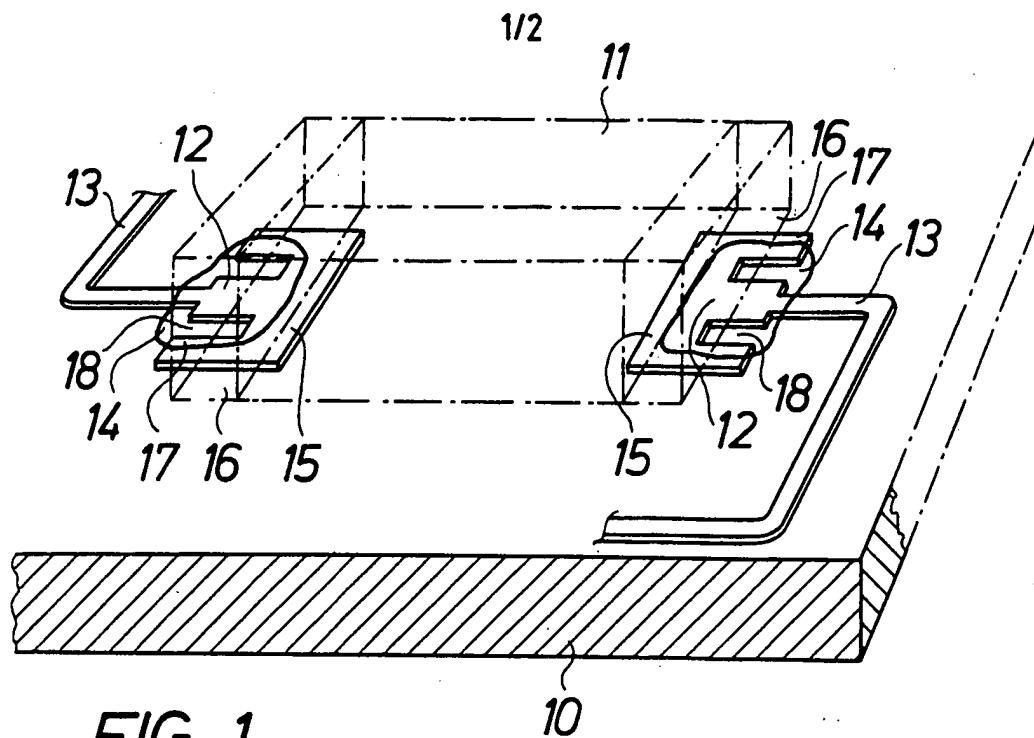

2/2

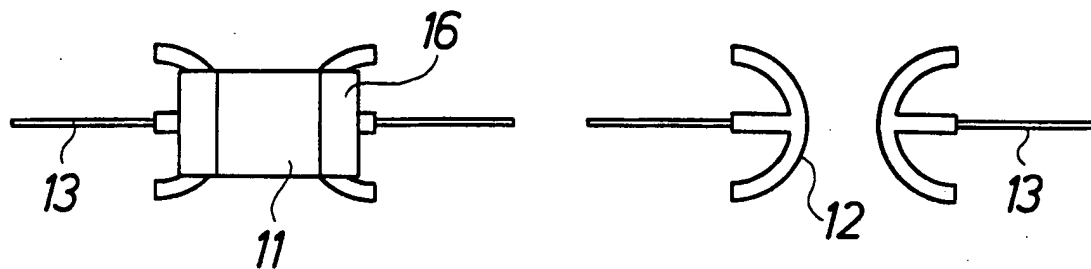


FIG. 4

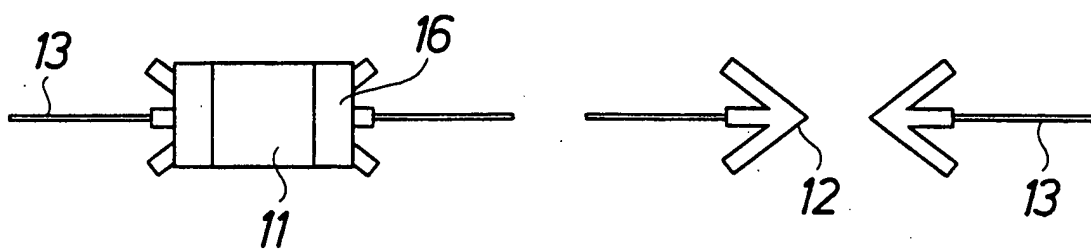


FIG. 5

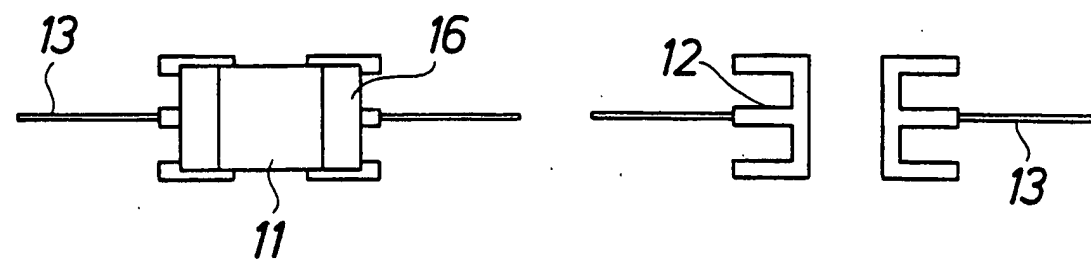


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00019

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H05K 3/32 // H05K 3/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG: WPI, CLAIMS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Elektroniktidningen, Volume -, No 16, October 1993, (Sweden); Per Henricsson, "Snart är problemen med limmade komponenter lösta", page 19 - page 20, see whole article -- -----	1

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

23 February 1995

06 -03- 1995

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Sven-Olof Wirlée
Telephone No. +46 8 782 25 00